


***After Updating/Installing the OSD Control App, this will be the first screen you are met with. The following instructions will walk-thru setting up the OSD Control App to the Nero-Max12/Max8/Control12.**

Once you open the OSD Control App, you will first see this screen. For proper configuration, please keep “Group 1” selected and proceed with selecting the “Settings” Button.



***Please note, the Wireless Device using the OSD Control App, should be connected to the same Wi-Fi Network that is hardwired into the Nero-Max12/Max8/Control12.**

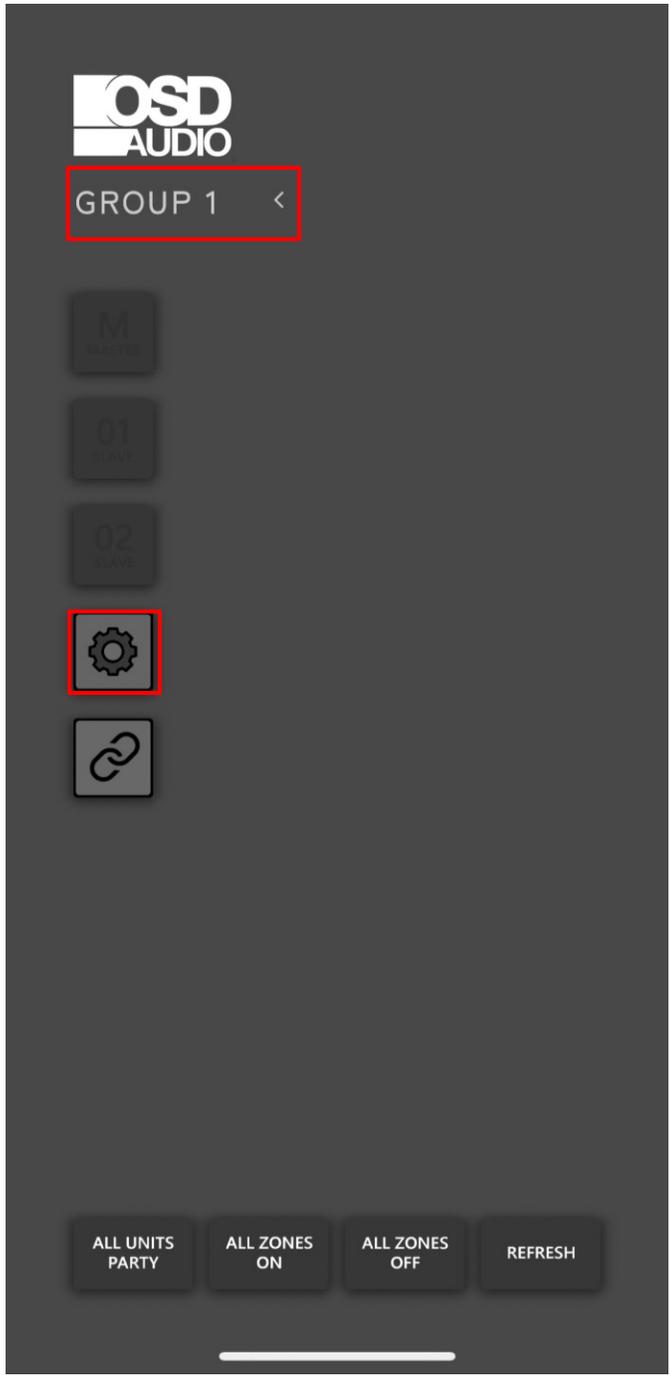

Press the “Settings” Symbol, to take you to the ‘Settings Page’.

This is the ‘Settings Page’, and the available features you can Adjust, Update, and Configure.

- < GROUP NAMING >
- ZONE NAMING >
- SOURCE NAMING >
- CONNECT / INFO >
- CONFIG >



- < GROUP NAMING >
- < ZONE NAMING >
- < SOURCE NAMING >
- < CONNECT / INFO >
- CONFIG >

In the Settings Page, “Config” is where you can access the different ‘Groups,’ and the selected devices in each of the Groups.

*Upon setup, you will want to enter this page, and change/adjust the device from the available ‘Drop-down Menu’. Based on the unit you have, you will be able to choose from “Max12”, “Max8”, and “Control12”. Please select your correct unit for Configuration.

< CONFIG

GROUP 1

MASTER	Control 12 <
SLAVE 1	MAX12 <
SLAVE 2	MAX12 <

GROUP 2

MASTER	MAX8 <
SLAVE 1	MAX8 <
SLAVE 2	MAX8 <

GROUP 3

MASTER	MAX12 <
SLAVE 1	MAX12 <



Use the “back-arrow”
to go back to the
previous screen.

GROUP 1

MASTER Control 12 <

SLAVE 1 MAX12 <

SLAVE 2 MAX12 <

GROUP 2

MASTER MAX8 <

SLAVE 1 MAX8 <

SLAVE 2 MAX8 <

GROUP 3

MASTER MAX12 <

SLAVE 1 MAX12 <



GROUP NAMING >

ZONE NAMING >

SOURCE NAMING >

CONNECT / INFO >

CONFIG >

Press
“Connect/Info” to
Pair/sync your
Wireless Device
(phone, tablet,
iPad, etc.) to the
App.



< ⓘ CONNECT / INFO

DEVICE IP	AUTO
- GROUP 1	NOT FOUND
- GROUP 2	NOT FOUND
- GROUP 3	NOT FOUND
MOBILE PHONE IP	192.168.5.114
APP VERSION	5.0.5

This is the “Connect/Info” Screen.

You will want to change the ‘Device I.P’ Setting from “Auto” to “Manual”, by pressing the “Auto” Button.



< ⓘ CONNECT / INFO


DEVICE IP	MANUAL
- GROUP 1	
- GROUP 2	
- GROUP 3	
MOBILE PHONE IP	192.168.5.114
APP VERSION	5.0.5

Your screen should look similar to this. After the button is adjusted to “Manual”, you will need to press it again, to change to “Auto.”

Here, the “Manual” button has been pushed to show “Auto”.

A pop-up will appear at the bottom of the screen, asking if you are Connecting a ‘Single Device’, or ‘Multiple Devices’.

This is solely based on the number of Nero-Max12, Max8 and Control12 devices you have and are looking to connect at one time.

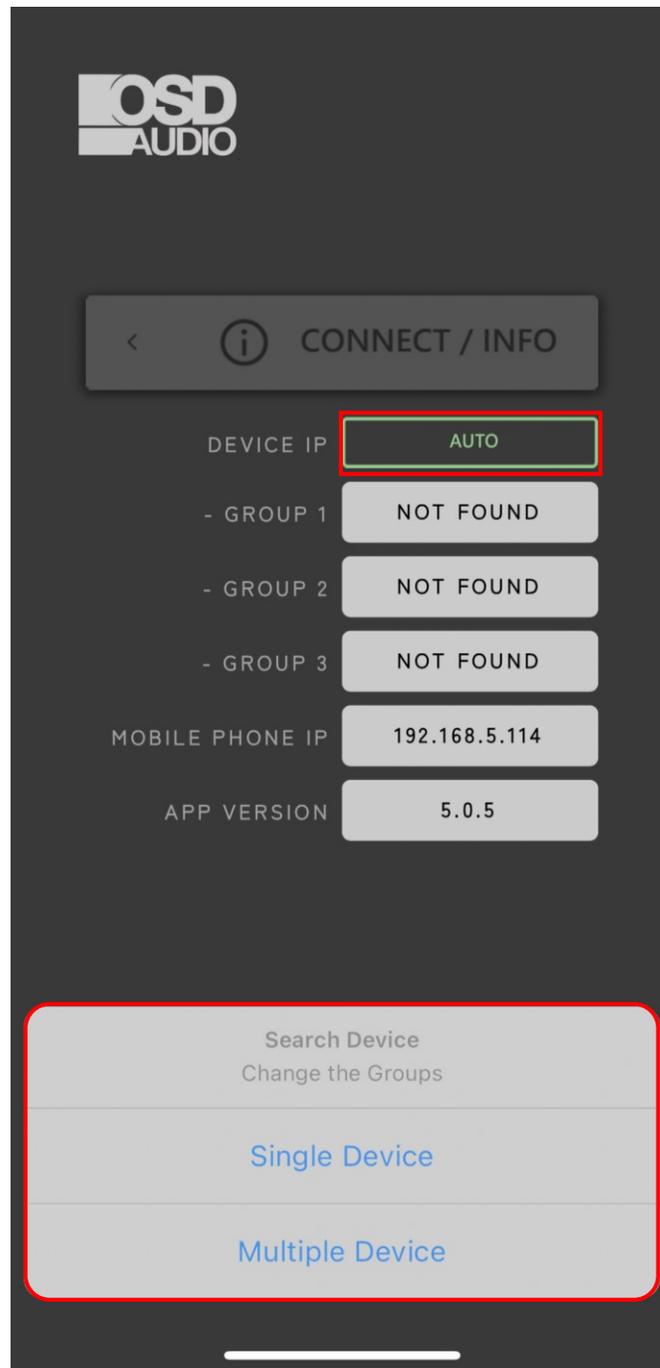



< ⓘ CONNECT / FIND

```
Start find begin:192.168.5.1
end:192.168.5.15
Finish find begin:192.168.5.1
end:192.168.5.15
Start find begin:192.168.5.16
end:192.168.5.30
```

After clicking “Single Device” or “Multiple Devices”, it will take you to this screen.

This screen will show the OSD Control App cycling through the different I.P Addresses within your Network. This will continue to cycle through I.P’s until it finds the Nero-Max12/Max8/Control12 on your Network



< ⓘ CONNECT / FIND

```
Start find begin:192.168.5.1
end:192.168.5.15
Finish find begin:192.168.5.1
end:192.168.5.15
Start find begin:192.168.5.16
end:192.168.5.30
Find IP: 192.168.5.29
Start verify: 192.168.5.29
Connected to: 192.168.5.29
Wattin for 192.168.5.29 response.
Receiver 192.168.5.29 response
GROUP 1 Save 192.168.5.29
Done
```



< ⓘ CONNECT / INFO

DEVICE IP AUTO

- GROUP 1 192.168.5.29

- GROUP 2 NOT FOUND

- GROUP 3 NOT FOUND

MOBILE PHONE IP 192.168.5.114

APP VERSION 5.0.5

Once the OSD Control App finds the Nero-Max12/Max8/Control12 I.P Address, it will refresh, and come back to this “Connect/Info” Screen.

If you only have x1 Nero-Max12/Max8/Control12, then it will only display “Group 1” with an available I.P Address.

If you have multiple Nero-Max12/Max8/Control12 units, then it will display the other I.P Address’ in a different ‘Group’ number.

< ⓘ CONNECT / INFO

DEVICE IP

- GROUP 1

- GROUP 2

- GROUP 3

MOBILE PHONE IP

APP VERSION

Use the “back-arrow” to go back to the previous screen.

< ✎ GROUP NAMING >

✎ ZONE NAMING >

✎ SOURCE NAMING >

ⓘ CONNECT / INFO >

🔧 CONFIG >

Use the “back-arrow” from the “Settings Page” to go back to the ‘Home Screen’.



GROUP 1 <



ZONE1 <

SOURCE1 <

VOLUME (18)

ZONE2 <

SOURCE1 <

VOLUME (18)

ZONE3 <

SOURCE1 <

VOLUME (18)


ALL UNITS
PARTY

ALL ZONES
ON

ALL ZONES
OFF

REFRESH

***Your device is now connected!
This will be the updated Home Screen.**

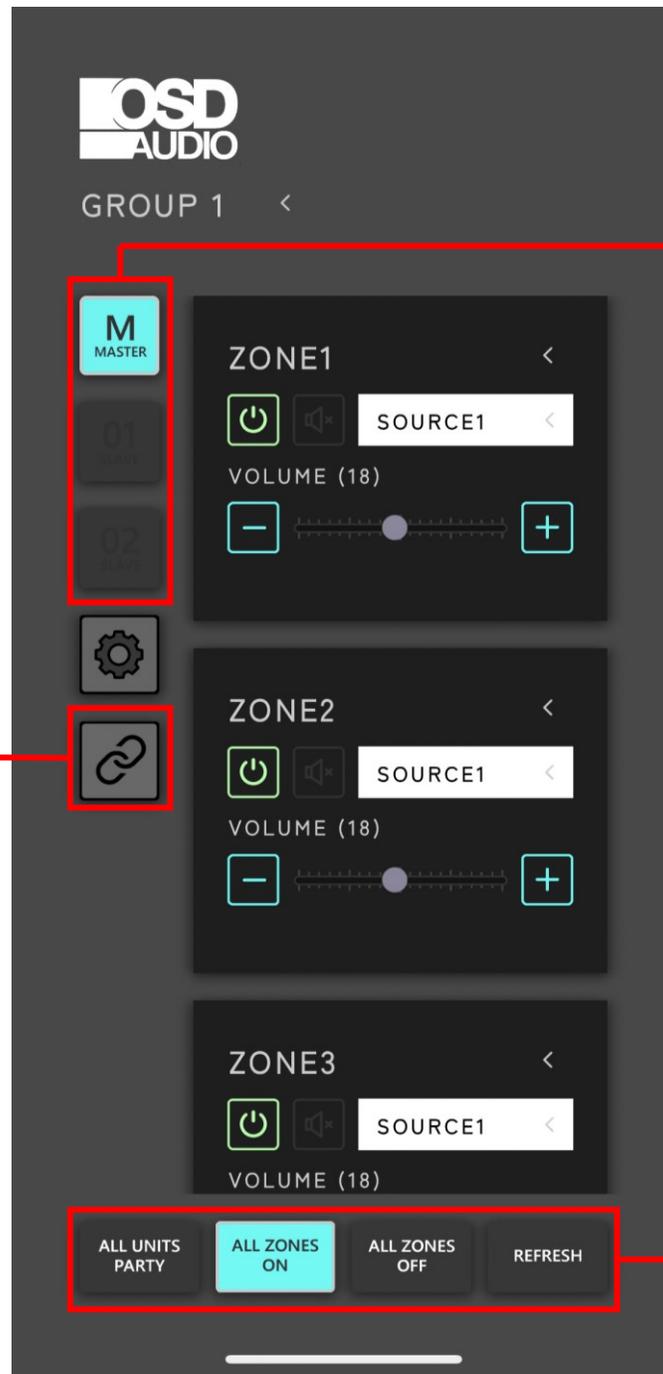

“Party Mode” offers more controls for Party Mode.

When a single **Device** is synced to with the App, the “Master” Button will only be available.

If multiple devices are synced, the “Slave 1” and “Slave 2” options will be available as additional **Zones**.

****A new feature has been added. The Link symbol, under “Settings” is a new “Master Party Mode”, allowing zone synchronization based on your needs.**

“All Units Party”, is a quick Pre-Set Party Mode that activates all zones prioritizing Source 1 as the main input. All zones will be in-sync, and Zone1 volume will control ALL Zones.


“All Zones On”, will enable all zones to power ‘On’.

“All Zones Off”, will disable all zones to power ‘Off’.


“Refresh” will reset the App or any other adjustments that have been made.

When the power symbol in each zone is lit Green, the Zone is Active. The amplifiers status light will turn White when each zone is Active.

If the speaker symbol is highlighted, then the zone has been Muted and the status lights on the amp will flash.

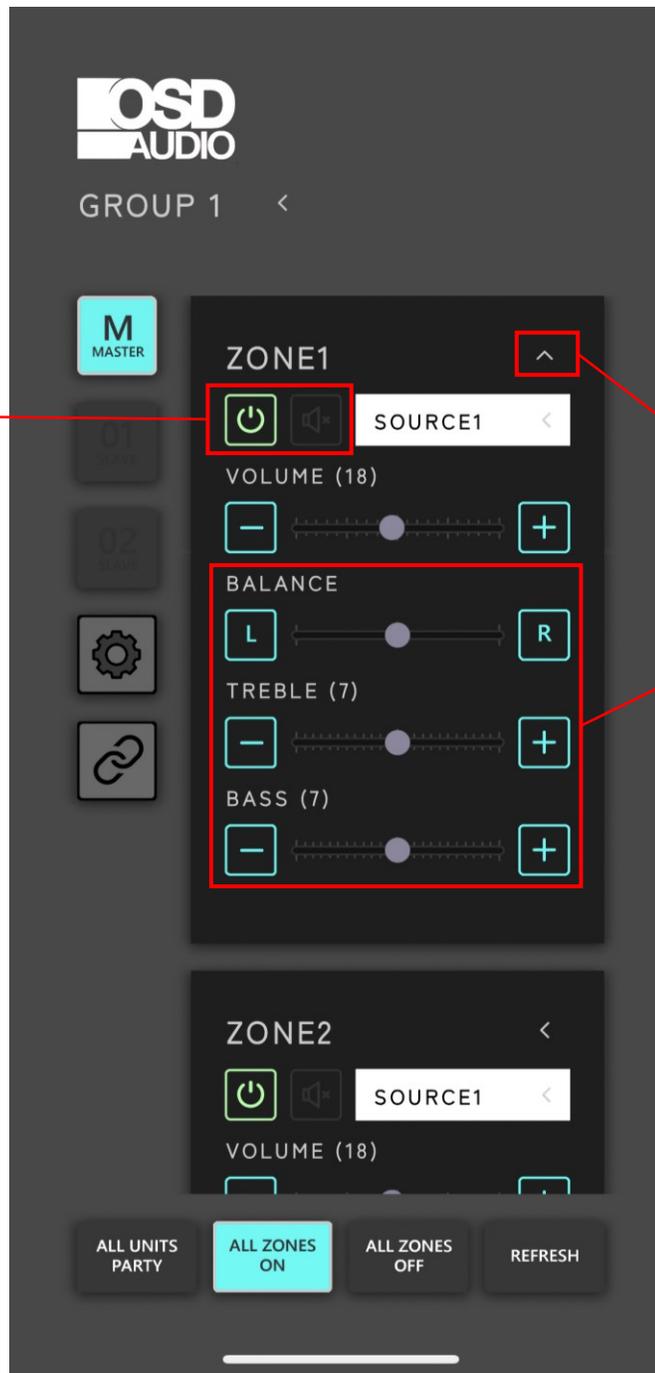

Use the “Drop-Down Arrow” to access additional features like – Bass, Treble, and Balance controls. These features can only be adjusted when a Zone is Active

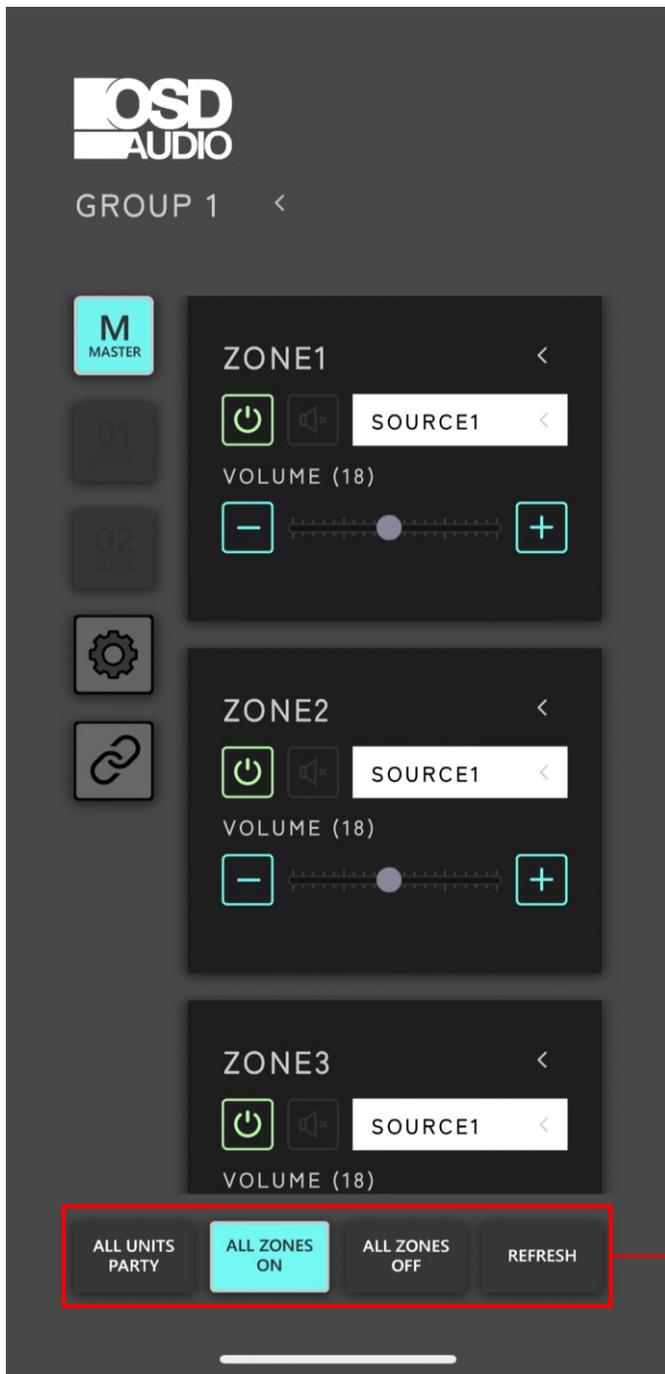

“All Units Party”, represents ‘Party Mode’ feature. This option will Turn all Zones ‘On’, and ‘Source 1’ will have priority as the selected Audio Source to play audio to all Zones. All of the Zones will be in-sync, and adjusting the Volume Slider for Zone1, will affect the slider for ALL Zones.

“All Zones On”, will enable all the Zones to Power ‘On’. Any previous saved Settings, Source, and Volume will be enabled per Zone.

“All Zones Off”, will quickly Power all Zones ‘Off’ at once. This will eliminate the need to scroll through each Zone and turn ‘Off’ each Zone individually.

“Refresh” Button will refresh the App and any other adjustments that have been made or configured. (This is useful if you have other people/devices controlling the system simultaneously)



GROUP 1 <



ZONE1 <



SOURCE1 <

VOLUME (18)



ZONE2 <



SOURCE1 <

VOLUME (18)



ZONE3 <



SOURCE1 <

VOLUME (18)

ALL UNITS
PARTY

ALL ZONES
ON

ALL ZONES
OFF

REFRESH

The new “Master Party Mode” Button will feature a new pop-up screen. Here, you can select if you want this feature to be ‘On’/’Off’, Volume Level Up/Down, and Select the Source of Audio. Additionally, you can pick-and-choose which Zones you want to be synced together in ‘Party Mode’.



GROUP 1 <

Return Home

Power

ON

OFF

Volume

-

|

+

Mute



Input

SOURCE1 <

Select All

1 ZONE1



25

2 ZONE2



18

3 ZONE3



18

4 ZONE4




29

5 ZONE5




18

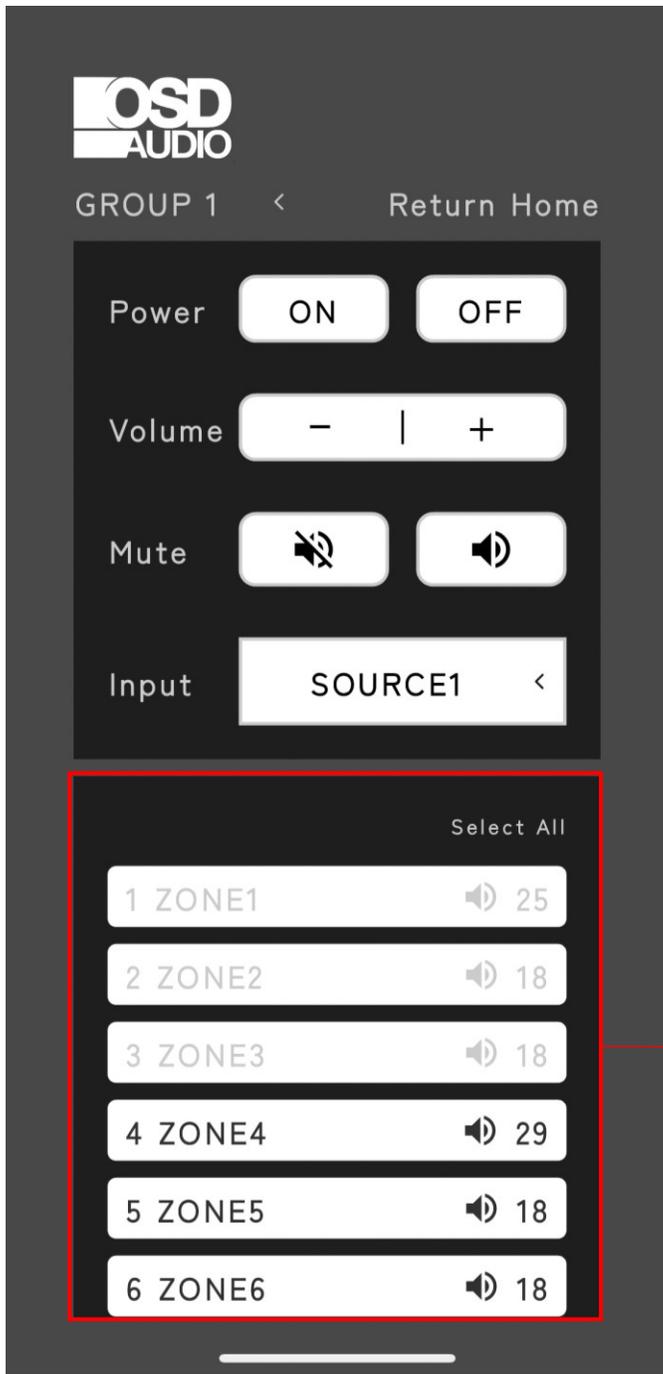

Here, only Zones 4-6 are selected to be 'On', and playing 'Source 1'. You can clearly view that Zones 1-3 are not highlighted, and are enabled 'Off'.

When pushing the drop-down for the 'Input', you will be able to select your Audio Source from Source 1-6.

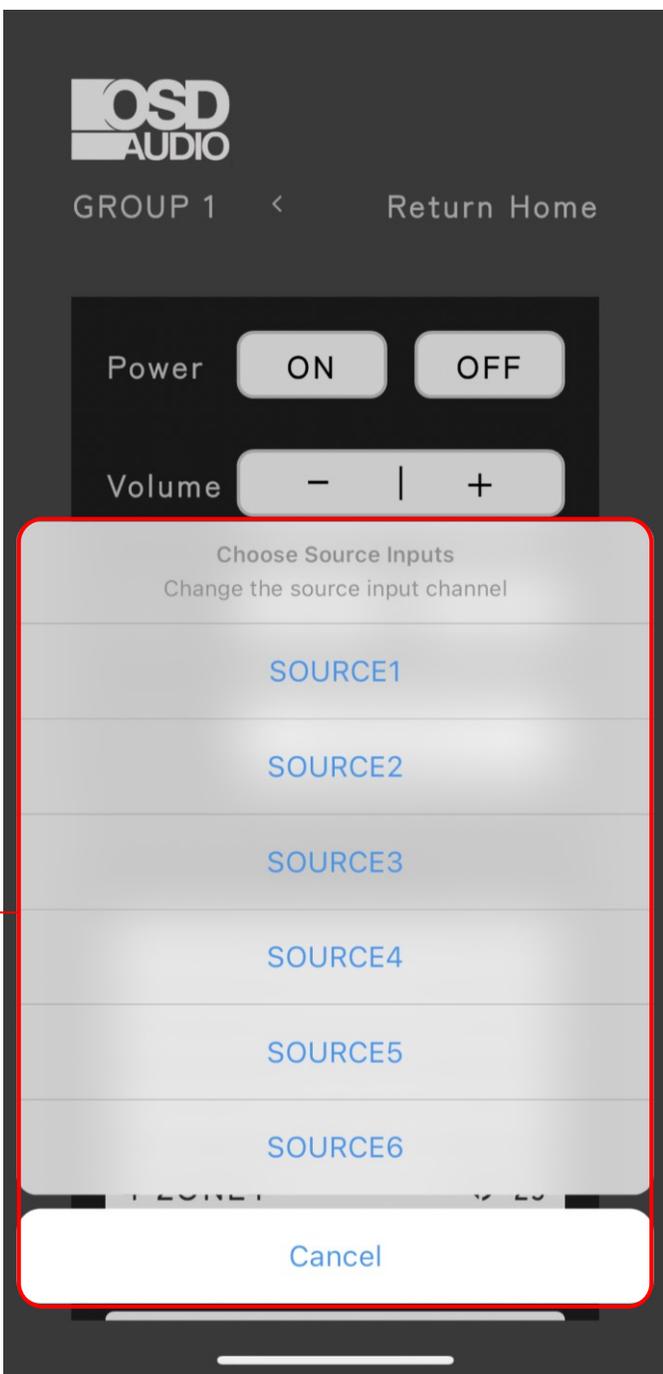

- < GROUP NAMING >
- ZONE NAMING >
- SOURCE NAMING >
- CONNECT / INFO >
- CONFIG >

Here, you can change/adjust the "Name" of each Group. The 'Group' will represent your unit – Nero-Max12/Max8/Contro l12



< GROUP NAMING

GROUP 1	<input type="text" value="GROUP 1"/>
GROUP 2	<input type="text" value="GROUP 2"/>
GROUP 3	<input type="text" value="GROUP 3"/>

CANCEL

SAVE

GROUP 1 <

ZONE1 <

SOURCE1 <

VOLUME (18)

ZONE2 <

SOURCE1 <

VOLUME (18)

ZONE3 <

SOURCE1 <

VOLUME (18)

- < GROUP NAMING >
- ZONE NAMING >
- SOURCE NAMING >
- CONNECT / INFO >
- CONFIG >

In the Settings Page, “Zone Naming” is where you can access the “Zone Names” and change the name.

Ex. Bedroom 1, Bathroom, Kitchen, Dining Room.



< ZONE NAMING

ZONE1	<input type="text" value="ZONE1"/>
ZONE2	<input type="text" value="ZONE2"/>
ZONE3	<input type="text" value="ZONE3"/>
ZONE4	<input type="text" value="ZONE4"/>
ZONE5	<input type="text" value="ZONE5"/>
ZONE6	<input type="text" value="ZONE6"/>

CANCEL

SAVE

- < GROUP NAMING >
- < ZONE NAMING >
- < SOURCE NAMING >**
- < CONNECT / INFO >
- < CONFIG >

**In the Settings Page,
“Source Naming” is where
you can rename the
“Source Names”.**

**Ex. TV, A/V Receiver,
Streamer, etc.**



< SOURCE NAMING

SOURCE1	SOURCE1
SOURCE2	SOURCE2
SOURCE3	SOURCE3
SOURCE4	SOURCE4
SOURCE5	SOURCE5
SOURCE6	SOURCE6

CANCEL

SAVE

- < GROUP NAMING >
- ZONE NAMING >
- SOURCE NAMING >
- CONNECT / INFO >
- CONFIG >

Each of the customer 'Naming' features now feature a new button – 'Broom', in the top-right corner. You can use this button to 'Clear All' of the Names that have been updated/adjusted.



- < GROUP NAMING

Sure you want to clear all?

-