

OSD SVC-300

Decora Options: White, Ivory & Almond



Rotary Style Heavy Duty 300 Watts peak Impedance Matching Volume Control; Kit includes White, Bone and Ivory color matched Decora® Inserts, Outer Plates and Knobs

FEATURES & SPECIFICATIONS

- Controls the volume in the dedicated room/zone
- The Wall mounted volume controller works with almost any audio system
- Low distortion and ruler flat frequency response
- Three color choices, all installation materials included

Specifications


- Power rating: 300 watts peak 20Hz-20kHz, 8 ohms Stereo
- -54dB, 12 step attenuation
- Impedance matching for 1/2, 4, 6, or 8 pairs of speakers. It can also use as non-impedance matching volume control if setting jumper setting at 1X which is default.
- Removable and solderless 14 gauge speaker "quick connect" terminals
- Includes metal mounting plate and color matched plastic
- Decora® style insert and knob
- Kits includes White, Ivory and Almond Plates, Inserts and Knobs
- Fits in single gang box, depth 2.9"
- 5-Yr Warranty



IMPEDANCE MATCHING SWITCH: SVC300/100/50 PLUS SLK300/100 INDOOR ROTARY STYLE



SVC300

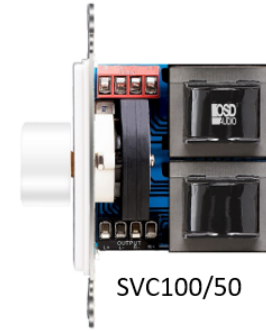

SVC100/50



SLK 300/100
Screwless Face Plate


The SVC300/100/50 plus the SLK300/100 feature an Impedance Switch located under the Decora Insert Plate on the left side. Note the 2X, 4X and 8X represents the number of 8-ohm speakers connected in Parallel. All Volume Controls connected to a single amp in parallel will be set to the same number. The following charts are used to calculate the Impedance setting, one is based upon using an 8-ohm Amp versus a 4-ohm Amp.

8-Ohm Rated Amplifier (8-ohm Speakers)							
1	2	3	4	5	6	7	8
1X	2X	4X	4X	8X	8X	8X	8X

Note: 4-Ohm Speakers are counted as Two 8-ohm

4-Ohm Rated AMP (8-ohm Speakers)							
1	2	3	4	5	6	7	8
1X	1X	2X	4X	4X	4X	4X	4X

Note: 4-Ohm Speakers are counted as Two 8-ohm

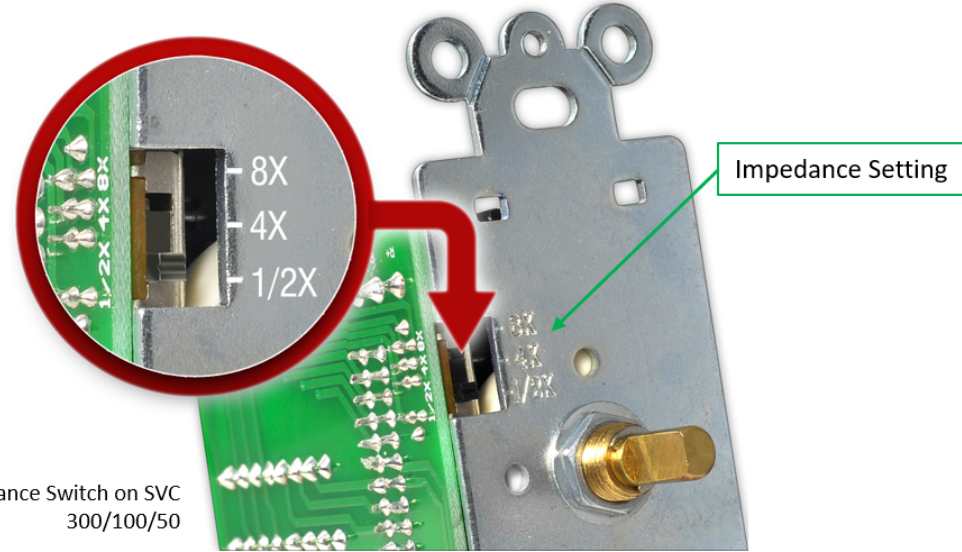

Impedance Switch on SVC
300/100/50

